



# AT8657/LED Flush-mount Microphone Socket with LED Ring and Touch Switch



## Accessories

### Features

- Flush-mount microphone socket for the ES945/ES947 or any phantom-powered gooseneck microphone with a 3-pin XLRM-type output and a base diameter no greater than 21 mm
- Mounts unobtrusively in tabletops
- Switch logic output permits control of remote devices from built-in capacitance switch
- Integral, phantom-powered, Green/Red LED indicator ring
- Operates on 24-48V DC phantom power
- 3-pin XLRM-type connector for microphone, 5-pin XLRM-type connector for output
- Lock tab in socket case automatically locks microphone in place, holding it there until tab is manually released by user
- Isolators provide mechanical dampening of mounting-surface vibration
- Low-profile design with low-reflectance black finish for minimum visibility

### Description

The AT8657/LED flush-mount microphone socket features a capacitive-type touch-sensitive switch, Green/Red LED indicator ring, switch logic output for controlling remote devices and a lock tab to hold microphone in place. The socket is equipped with a three-pin XLRM-type in, and a five-pin XLRM-type output connector.

The AT8657/LED requires 24-48V DC phantom power for operation. The electronics in the socket take up to 30 seconds to stabilize after power is applied; during this start-up period, some sonic disturbances may be heard upon switching if the system is "live."

The touch-sensitive switch can be used to trigger an external device.

The lock tab, located in the socket case, automatically engages when microphone is inserted, securely holding it in place until tab is manually released by user.

The output of the socket is a 5-pin XLRM-type connector.

Isolators are included with the unit for mechanical isolation from the mounting surface. A retaining ring is also included for use with gooseneck microphones. The socket is enclosed in a heavy-duty die-cast case. The low-profile housing has a low-reflectance black finish.

### Installation and Operation

The AT8657/LED requires 24-48V DC phantom power for operation.

Output is low impedance (Lo-Z) balanced. The signal appears across Pins 2 and 3; Pin 1 is ground (shield). Output phase is "Pin 2 hot" — positive acoustic pressure produces positive voltage at Pin 2. Switch logic output appears between pins 1 and 4. LED logic input appears between pins 1 and 5.

The microphone socket should be installed on a flat, unobstructed mounting surface.

The AT8657/LED should be mounted to a tabletop using the included isolators in order to dampen surface vibration. To mount the socket with the isolators, a 35 mm (1 3/8") hole is recommended. Place the isolators on either side of the hole to achieve mechanical isolation from the mounting surface.

Use the retaining ring to hold a gooseneck microphone securely in the socket. Insert the microphone and plug it into the three-pin XLRM-type input, then slip the rubber isolator and retaining ring over the microphone and screw it in place at the microphone's base using included screws. Note: The retaining ring and gooseneck isolator are used only with gooseneck microphones.

The AT8657/LED's capacitive-type touch-sensitive switch allows the user to trigger a function on an external device: Switch logic output is High (+5V DC) when pressed. Low (0V DC) when not pressed.

The LED indicator ring lights green when logic high (+5V DC) and red when logic low (0V DC).




Avoid leaving the microphone in the open sun or in areas where temperatures exceed 110° F (43° C) for long periods of time. Extremely high humidity should also be avoided.



# AT8657/LED

## Pin-out Configuration

	Function
Pin 1	Ground
Pin 2	Audio +
Pin 3	Audio -
Pin 4	Switch Logic
Pin 5	LED Input

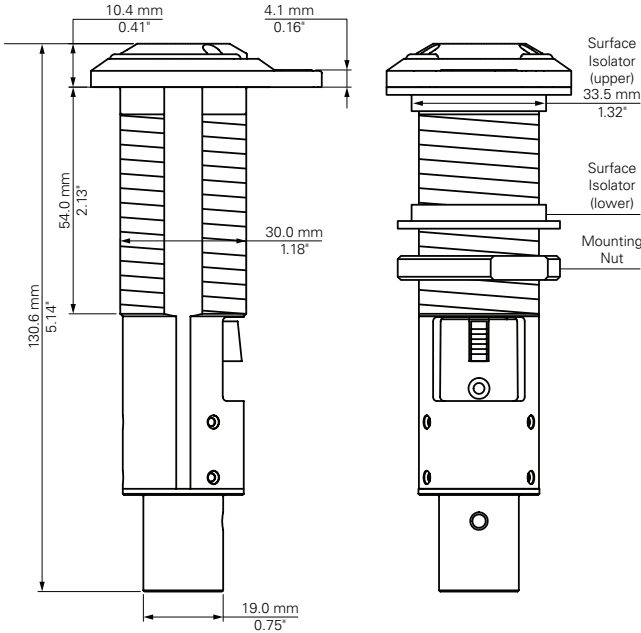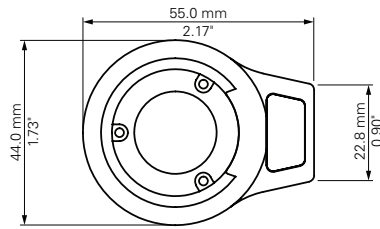

## Specifications

Output Impedance	360 Ohms
Switch Logic	High (+5V DC) when pressed; Low (0V DC) when not pressed
I/O Voltage	-0.5V to 5.5V
LED Input	Green when high (+5V DC), Red when low (0V DC), TTL compatible
Maximum Input Voltage	-0.5V to 5.5V
Phantom Power Requirements	24-48V DC, 4 mA typical
Switches	Touch-sensitive control: momentary
Weight	165 g (5.8 oz)
Dimensions	130.64 mm (5.14") long, 55.0 mm (2.17") maximum width
Input connector	3-pin XLR-F-type
Output connector	5-pin XLR-M-type
Accessories furnished	One pair surface isolators; gooseneck retaining ring & isolator; mounting nut; screws (3)

In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.

1 Pascal = 10 dynes/cm<sup>2</sup> = 10 microbars = 94 dB SPL

<sup>1</sup> Typical, A-weighted, using Audio Precision System One.

Specifications are subject to change without notice.

To reduce the environmental impact of a multi-language printed document, product information is available online at [www.audio-technica.com](http://www.audio-technica.com) in a selection of languages.

Afin de réduire l'impact sur l'environnement de l'impression de plusieurs langues, les informations concernant les produits sont disponibles sur le site [www.audio-technica.com](http://www.audio-technica.com) dans une large sélection de langue.

Para reducir el impacto al medioambiente, y reducir la producción de documentos en varios leguajes, información de nuestros productos están disponibles en nuestra página del Internet: [www.audio-technica.com](http://www.audio-technica.com).

Para reduzir o impacto ecológico de um documento impresso de várias linguas, a Audio-Technica providência as informações dos seus produtos em diversas linguas na [www.audio-technica.com](http://www.audio-technica.com).

Per evitare l'impatto ambientale che la stampa di questo documento determinerebbe, le informazioni sui prodotti sono disponibili online in diverse lingue sul sito [www.audio-technica.com](http://www.audio-technica.com).

Der Umwelt zuliebe finden Sie die Produktinformationen in deutscher Sprache und weiteren Sprachen auf unserer Homepage: [www.audio-technica.com](http://www.audio-technica.com).

Om de gevolgen van een gedrukte meertalige handleiding op het milieu te verkleinen, is productinformatie in verschillende talen "on-line" beschikbaar op: [www.audio-technica.com](http://www.audio-technica.com).

本公司基於減少對環境的影響，將不作多語言文件的印刷，有關產品訊息可在 [www.audio-technica.com](http://www.audio-technica.com) 的官方網頁上選擇所屬語言及瀏覽。

本公司基于减少对环境的影响，将不作多语言文档的印刷，有关产品信息可在 [www.audio-technica.com](http://www.audio-technica.com) 的官方网页上选择所属语言和浏览。

자원 절약, 환경보호를 위해 국문 사용 설명서는 인쇄하지 않았습니다. 제품정보는 [www.audio-technica.com](http://www.audio-technica.com) 에서 원하는 언어 선택 후에 다운로드 받으실 수 있습니다.



audio-technica

P52705

