



Introduction

The Atlona **AT-HDVS-CAM** is an enterprise-grade PTZ camera designed for use with the AT-UHD-HDVS-300-KIT in soft codec conferencing applications. It features a USB interface for video and camera control. The HDVS-CAM seamlessly integrates with the HDVS-300-KIT for a complete, automated conferencing system that includes AV and USB extension, plus automatic input selection and display powering when a PC is connected. The HDVS-CAM delivers high performance, professional-quality imaging with video resolutions up to 1080p @ 30 Hz, as well as fast and accurate auto-focusing, and a fast yet quiet pan and tilt mechanism. This PTZ camera is ideal for a wide range of small to medium-sized meeting spaces, classrooms, and training rooms.

Applications


- **Meeting spaces and conference rooms**
The HDVS-CAM works together with the USB extension capability of the HDVS-300 system to enable simple, clean connectivity from the front wall to PCs at the meeting table.
- **Classrooms and other instructional spaces**
The HDVS-CAM is ideal for distance learning and collaboration, as well as lecture capture.



Key Features

- Designed for soft codec applications with the HDVS-300 system
- Also available as part of an AT-UHD-HDVS-300-C-KIT system package
- USB 2.0 interface for video and camera control
- Universal PC compatibility through standard UVC (USB Video Class) driver
- Compatible with a wide range of soft codecs and unified communications (UC) platforms
- High performance imaging, fine detail, and color rendering with 1/2.8" low-noise, HD CMOS sensor
- Available video resolutions from 176x144 up to 1080p @ 30 Hz
- Fast and accurate auto focus, plus auto white balance and auto exposure modes
- Fast and quiet pan and tilt mechanism
- Multi-element zoom lens with 10x optical zoom and a 60.9° horizontal field of view
- Picture controls available for brightness, color, saturation, contrast, sharpness, and gamma
- TCP/IP, RS-232, USB, and IR control – convenient handheld IR remote control included
- PTZ camera control available from popular soft codec and UC clients such as Skype® for Business
- Easy, GUI-based configuration using integrated web server
- Configured and managed by AMS (Atlona Management System)
- Award-winning 10 year limited product warranty

Connection Diagram

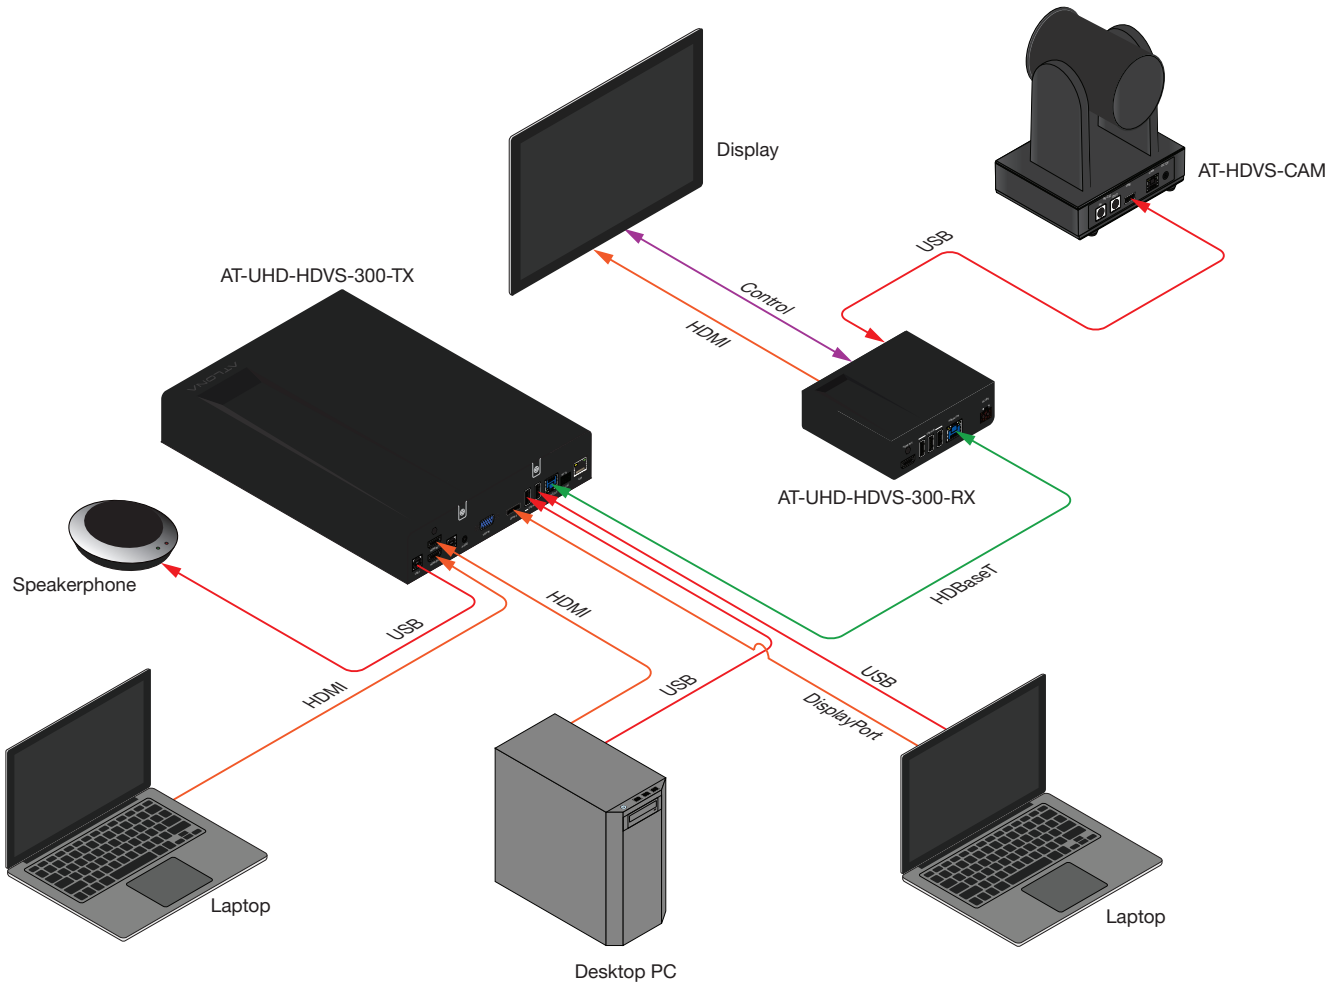



PTZ Camera

for HDVS-300 Soft Codec Conferencing System

Specifications

| Video | | |
|---|--|-------------------|
| HD/SD/VESA (all resolutions are @30/25/20/15/10/5Hz) | 1080p, 720p, 1680x896, 1024x768, 1024x576, 960x540, 800x600, 640x360, 720x576, 640x480, 352x288, 320x240, 320x180, 176x144 | |
| Optical Zoom | 10X, f = 4.7 ~ 47 mm | |
| Viewing Angle | 6.43° (telephoto), 60.9° (wide-angle) | |
| AV | F1.6 - F3.0 | |
| Minimum Illumination | 0.5 lm, F1.8 with Automatic Gain Control ON | |
| Video Compression | H.264, H.265 | |
| Control Protocol | VISCA/Pelco-D/Pelco-P | |
| Network Protocol | RTSP/RTMP, ONVIF | |
| Pan Rotation | ±170° | |
| Tilt Rotation | -30° ~ ±90° | |
| Pan Control Speed | 0.1 - 180° / sec | |
| Tilt Control Speed | 0.1 - 80° / sec | |
| Temperature | Fahrenheit | Celsius |
| Operating | 14 to 122 | -10 to 50 |
| Storage | -14 to 140 | -10 to 60 |
| Operating Humidity (RH) | 20% to 95%, non-condensing | |
| Storage Humidity (RH) | 20% to 80%, non-condensing | |
| Power | | |
| Consumption | 12 W | |
| Supply | Input: 110 - 220 V AC, 50/60 Hz Output: 12 V DC, 1 A | |
| Dimensions | Inches | Millimeters |
| H x W x D | 6.59 x 5.90 x 5.90 | 167.5 x 150 x 150 |
| Weight | Pounds | Kilograms |
| Device | 3.08 | 1.4 |
| Certification | | |
| Device | CE, FCC | |

© 2017 Atlona Inc. All rights reserved. "Atlona" and the Atlona logo are registered trademarks of Atlona Inc. All other brand names and trademarks or registered trademarks are the property of their respective owners. Pricing, specifications and availability subject to change without notice. Actual products, product images, and online product images may vary from images shown here.