



**Tough on the outside.
Smart on the inside.**

BMP®21-PLUS Label Printer

Tough on the outside. Smart on the inside.

Make your life a little easier. Let the **BMP®21-PLUS Label Printer** work for you. This printer's tough enough and smart enough to help you power through your daily challenges — and still get the job done. Plus, it can tackle just about any custom labeling job you can dream up.

- **Tough** — this printer isn't bothered by occasional rough landings in your toolbox or on the job. With rubber bumpers and handy side grips, it's sturdy enough to handle applications in tight spaces or the great outdoors.
- **Smart** — auto-formatting does the design work for your labels so you can focus on enhancing them with more than 100 symbols. Create professional-looking labels for datacom, electrical, safety and home.
- **User friendly** — just load, type and print to make your wire wrap, patch panel and cable flag labeling jobs a snap. For convenience, this printer has a hands-free label grabber that holds your label until you're ready to apply.

The complete BMP21-PLUS Label Printer solution



BMP21-PLUS Printer

Page 3

Label cartridges

Pages 4

Printer and accessories

Page 7

Printer specifications

Page 7

BMP[®]21-PLUS

LABEL PRINTER



Indoor and outdoor vinyl labels for safety, facility and lean / 5S (B-595)

Continuous vinyl material ideal for lean / 5S labels, pipe markers, equipment and production area identification. These labels offer excellent resistance to oils, detergents, dirt, grime and many solvents. Permanent adhesive, very pliable, suitable for rough surfaces and outdoor use. 8-10 years average outdoor durability.* Temp. range: -40° F to 180° F (-40° C to 82° C). UL recognized.




Figure 33b



| Figure | Catalog # | B# | Material | Color | Label width A inch (mm) | Roll length B feet (m) | Labels per roll | Ribbon in cartridge |
|----------|----------------|-------|----------|-----------------|-------------------------|------------------------|-----------------|---------------------|
| Fig. 33b | M21-250-595-WT | B-595 | Vinyl | Black on white | 0.250 (6.35) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-375-595-WT | B-595 | Vinyl | Black on white | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-500-595-WT | B-595 | Vinyl | Black on white | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-750-595-WT | B-595 | Vinyl | Black on white | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-250-595-YL | B-595 | Vinyl | Black on yellow | 0.250 (6.35) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-375-595-YL | B-595 | Vinyl | Black on yellow | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-500-595-YL | B-595 | Vinyl | Black on yellow | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-750-595-YL | B-595 | Vinyl | Black on yellow | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-375-595-OR | B-595 | Vinyl | Black on orange | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-500-595-OR | B-595 | Vinyl | Black on orange | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-750-595-OR | B-595 | Vinyl | Black on orange | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-375-595-BK | B-595 | Vinyl | White on black | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-500-595-BK | B-595 | Vinyl | White on black | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-750-595-BK | B-595 | Vinyl | White on black | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-375-595-RD | B-595 | Vinyl | White on red | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-500-595-RD | B-595 | Vinyl | White on red | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-750-595-RD | B-595 | Vinyl | White on red | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-375-595-BL | B-595 | Vinyl | White on blue | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-500-595-BL | B-595 | Vinyl | White on blue | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-750-595-BL | B-595 | Vinyl | White on blue | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-375-595-BR | B-595 | Vinyl | White on brown | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-500-595-BR | B-595 | Vinyl | White on brown | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-750-595-BR | B-595 | Vinyl | White on brown | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-375-595-GN | B-595 | Vinyl | White on green | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-500-595-GN | B-595 | Vinyl | White on green | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-750-595-GN | B-595 | Vinyl | White on green | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-375-595-PL | B-595 | Vinyl | White on purple | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-500-595-PL | B-595 | Vinyl | White on purple | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-750-595-PL | B-595 | Vinyl | White on purple | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4400 |
| Fig. 33b | M21-375-595-GY | B-595 | Vinyl | Black on gray | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-500-595-GY | B-595 | Vinyl | Black on gray | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-750-595-GY | B-595 | Vinyl | Black on gray | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R6000 |

*Average expected outdoor life of product will depend on user definition of failure, climatic conditions, mounting techniques and material color. The 8 to 10 year outdoor durability applies to the vinyl label stock only; ribbon durability will vary.

Patch panel adhesive strips (B-499 and B-595)

Continuous material for port identification features user-specified spacing when using patch panel mode.

- **B-499 permanent nylon cloth** - Durable industrial strength material designed to conform to curved or flat surfaces
- **B-595 permanent vinyl** - Very pliable, suitable for rough surfaces and outdoor use. Offers excellent resistance to oils, detergents, dirt, grime and many solvents




Figure 33b



| Figure | Catalog # | B# | Material | Color | Label width A inch (mm) | Roll length B feet (m) | Labels per roll | Ribbon in cartridge |
|--------------------------|----------------|-------|-------------|----------------|-------------------------|------------------------|-----------------|---------------------|
| B-499 nylon cloth | | | | | | | | |
| Fig. 33b | M21-375-499 | B-499 | Nylon cloth | Black on white | 0.375 (9.53) | 16 (4.88) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-500-499 | B-499 | Nylon cloth | Black on white | 0.500 (12.70) | 16 (4.88) | 1 roll (cont.) | R4300 |
| B-595 vinyl | | | | | | | | |
| Fig. 33b | M21-375-595-WT | B-595 | Vinyl | Black on white | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R6000 |
| Fig. 33b | M21-500-595-WT | B-595 | Vinyl | Black on white | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R6000 |

Terminal block adhesive strips (B-499)

Continuous, narrow nylon cloth strips for alignment on terminal blocks. The printer's terminal block mode allows for user-specified spacing.

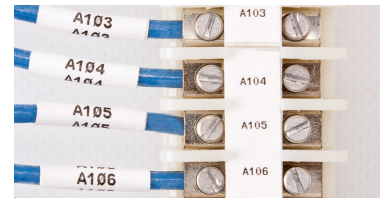



Figure 33b

| Figure | Catalog # | B# | Material | Color | Label width A inch (mm) | Roll length B feet (m) | Labels per roll | Ribbon in cartridge |
|----------|----------------|-------|-------------|----------------|-------------------------|------------------------|-----------------|---------------------|
| Fig. 33b | M21-375-499-TB | B-499 | Nylon cloth | Black on white | 0.375 (9.53) | 16 (4.88) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-500-499-TB | B-499 | Nylon cloth | Black on white | 0.500 (12.70) | 16 (4.88) | 1 roll (cont.) | R4300 |

Nylon cloth wire and cable labels (B-499)

Continuous labels wrap around wires and are highly pliable, conforming to tightly curved surfaces. When in wire marker mode, text auto-repeats on the label. Labels can also be used for flagging with the flag mode.

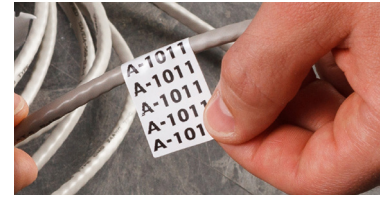



Figure 33b

| Figure | Catalog # | B# | Material | Color | Label width A inch (mm) | Roll length B feet (m) | Labels per roll | Ribbon in cartridge |
|----------|-------------|-------|-------------|----------------|-------------------------|------------------------|-----------------|---------------------|
| Fig. 33b | M21-375-499 | B-499 | Nylon cloth | Black on white | 0.375 (9.53) | 16 (4.88) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-500-499 | B-499 | Nylon cloth | Black on white | 0.500 (12.70) | 16 (4.88) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-750-499 | B-499 | Nylon cloth | Black on white | 0.750 (19.05) | 16 (4.88) | 1 roll (cont.) | R4300 |

Self-laminating vinyl wire and cable labels (B-427)

Labels feature a clear, non-printable area that wraps around the print-on area to protect text. Vinyl material offers superior resistance to solvents, oil, grease, and water. Temp. range: -40° F to 158° F (-40° C to 70° C). UL recognized.




Figure 42b

| Figure | Catalog # | B# | Material | Color | Approx. wire gauge | Label width A inch (mm) | Roll length B feet (m) | Print-on area C inch (mm) | Labels per roll | Ribbon in cartridge |
|----------|--------------|-------|----------|----------------|--------------------|-------------------------|------------------------|---------------------------|-----------------|---------------------|
| Fig. 42b | M21-750-427 | B-427 | Vinyl | Black on white | 16 to 10 | 0.75 (19.05) | 14 (4.27) | 0.375 (9.53) | 1 roll (cont.) | R4300 |
| Fig. 42b | M21-1000-427 | B-427 | Vinyl | Black on white | 12 to 10 | 1.00 (25.40) | 14 (4.27) | 0.375 (9.53) | 1 roll (cont.) | R4300 |
| Fig. 42b | M21-1250-427 | B-427 | Vinyl | Black on white | 10 to 4 | 1.25 (30.48) | 14 (4.27) | 0.50 (12.70) | 1 roll (cont.) | R4300 |
| Fig. 42b | M21-1500-427 | B-427 | Vinyl | Black on white | 10 to 4 | 1.50 (38.10) | 14 (4.27) | 0.50 (12.70) | 1 roll (cont.) | R4300 |

PermaSleeve® PS Heat-shrink Wire Markers (B-342)

Military / industrial grade sleeves offer the ultimate in marker durability, permanence and aesthetic appearance. 3:1 heat-shrinkable markers fit snugly around wires, are fade-resistant and flame-retardant. Temp range: -67° F to 275° F (-55° C to 135° C). RoHS compliant and UL recognized.

Meets specifications:

- SSAE-AS-23053/5
- SAE-AS-81531

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202




Figure 33b

| Figure | Catalog # | B# | Material | Color | Approx. wire gauge | Max wire dia. inch (mm) | Supplied dia. A inch (mm) | Roll length B feet (m) | Labels per roll | Ribbon in cartridge |
|----------|---------------------|-------|------------|-----------------|--------------------|---------------------------|---------------------------|------------------------|-----------------|---------------------|
| Fig. 33b | ** M21-125-C-342 | B-342 | Polyolefin | Black on white | 22 to 16 | 0.046 - 0.110 (1.2 - 2.8) | 0.125 (3.2) | 7 (2.13) | 1 roll (cont.) | R4300 |
| Fig. 33b | ** M21-187-C-342 | B-342 | Polyolefin | Black on white | 20 to 10 | 0.062 - 0.150 (1.6 - 3.8) | 0.187 (4.9) | 7 (2.13) | 1 roll (cont.) | R4300 |
| Fig. 33b | ** M21-250-C-342 | B-342 | Polyolefin | Black on white | 16 to 8 | 0.094 - 0.215 (2.4 - 5.5) | 0.250 (6.9) | 7 (2.13) | 1 roll (cont.) | R4300 |
| Fig. 33b | ** M21-375-C-342 | B-342 | Polyolefin | Black on white | 12 to 4 | 0.125 - 0.320 (3.2 - 8.1) | 0.375 (10.7) | 7 (2.13) | 1 roll (cont.) | R4300 |
| Fig. 33b | ** M21-125-C-342-YL | B-342 | Polyolefin | Black on yellow | 22 to 16 | 0.046 - 0.110 (1.2 - 2.8) | 0.125 (3.2) | 7 (2.13) | 1 roll (cont.) | R4300 |
| Fig. 33b | ** M21-187-C-342-YL | B-342 | Polyolefin | Black on yellow | 20 to 10 | 0.062 - 0.150 (1.6 - 3.8) | 0.187 (4.9) | 7 (2.13) | 1 roll (cont.) | R4300 |
| Fig. 33b | ** M21-250-C-342-YL | B-342 | Polyolefin | Black on yellow | 16 to 8 | 0.094 - 0.215 (2.4 - 5.5) | 0.250 (6.9) | 7 (2.13) | 1 roll (cont.) | R4300 |
| Fig. 33b | ** M21-375-C-342-YL | B-342 | Polyolefin | Black on yellow | 12 to 4 | 0.125 - 0.320 (3.2 - 8.1) | 0.375 (10.7) | 7 (2.13) | 1 roll (cont.) | R4300 |


** ⚠️ WARNING: Cancer www.P65Warnings.ca.gov

Polyester labels for inside panel markings and general identification (B-423, B-430 and B-488)

- **B-423 polyester** - white glossy polyester with permanent adhesive
- **B-430 polyester** - clear glossy polyester with permanent adhesive
- **B-488 polyester** - solvent-resistant, white matte polyester with permanent adhesive



Figure 33b

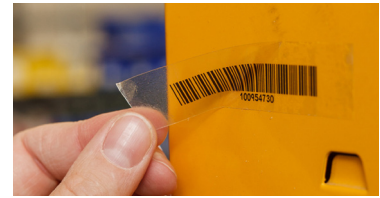


| Figure | Catalog # | B# | Material | Color | Label width A inch (mm) | Roll length B feet (m) | Labels per roll | Ribbon in cartridge |
|------------------------------------|-------------------|-------|-----------|----------------|-------------------------|------------------------|-----------------|---------------------|
| B-423 gloss white polyester | | | | | | | | |
| Fig. 33b | M21-250-423 | B-423 | Polyester | Black on white | 0.250 (6.35) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-375-423 | B-423 | Polyester | Black on white | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-500-423 | B-423 | Polyester | Black on white | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-750-423 | B-423 | Polyester | Black on white | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R6200 |
| B-430 gloss clear polyester | | | | | | | | |
| Fig. 33b | M21-250-430 | B-430 | Polyester | Black on clear | 0.250 (6.35) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-375-430 | B-430 | Polyester | Black on clear | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-500-430 | B-430 | Polyester | Black on clear | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-750-430 | B-430 | Polyester | Black on clear | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-250-430-WT-CL | B-430 | Polyester | White on clear | 0.250 (6.35) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-375-430-WT-CL | B-430 | Polyester | White on clear | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-500-430-WT-CL | B-430 | Polyester | White on clear | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R6200 |
| Fig. 33b | M21-750-430-WT-CL | B-430 | Polyester | White on clear | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R6200 |
| B-488 matte white polyester | | | | | | | | |
| Fig. 33b | M21-375-488 | B-488 | Polyester | Black on white | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-500-488 | B-488 | Polyester | Black on white | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-750-488 | B-488 | Polyester | Black on white | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4300 |

Laboratory labels (B-461 and B-7425)

- **B-461 polyester** - all-white material with smudge resistance, solvent resistance and is suitable for low-temperature applications
- **B-7425 polypropylene** - economical white material with chemical and high-temperature resistance



Figure 33b

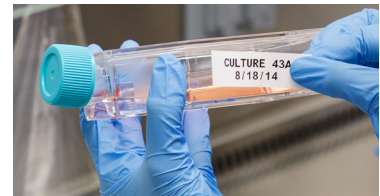

| Figure | Catalog # | B# | Material | Color | Label width A inch (mm) | Roll length B feet (m) | Labels per roll | Ribbon in cartridge |
|-----------------------------|--------------|--------|---------------|----------------|-------------------------|------------------------|-----------------|---------------------|
| B-461 polyester | | | | | | | | |
| Fig. 33b | M21-375-461 | B-461 | Polyester | Black on white | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-500-461 | B-461 | Polyester | Black on white | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-750-461 | B-461 | Polyester | Black on white | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4300 |
| B-7425 polypropylene | | | | | | | | |
| Fig. 33b | M21-375-7425 | B-7425 | Polypropylene | Black on white | 0.375 (9.53) | 21 (6.40) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-500-7425 | B-7425 | Polypropylene | Black on white | 0.500 (12.70) | 21 (6.40) | 1 roll (cont.) | R4300 |
| Fig. 33b | M21-750-7425 | B-7425 | Polypropylene | Black on white | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4300 |

Water-dissolvable paper labels (B-403)

Continuous paper material designed for temporary identification. Material completely dissolves in warm water within 30 seconds, leaving no adhesive residue.











Figure 33b



| Figure | Catalog # | B# | Material | Color | Label width A inch (mm) | Roll length B feet (m) | Labels per roll | Ribbon in cartridge |
|----------|-------------|-------|-------------------|----------------|-------------------------|------------------------|-----------------|---------------------|
| Fig. 33b | M21-750-403 | B-403 | Dissolvable paper | Black on white | 0.750 (19.05) | 21 (6.40) | 1 roll (cont.) | R4300 |

Printer and accessories

| Catalog # | Description |
|---|----------------------------------|
|  BMP21-PLUS | BMP21-PLUS Label Printer* † |
|  BMP21-PLUS-KIT1 | BMP21-PLUS Label Printer Kit** † |
|  M-AC-110937 | AC adapter / charger |
|  BMP21-PLUS-BATT | Li-Ion battery pack |

| Catalog # | Description |
|---|---|
|  BMP21-TOOL | Multi-function tool (magnet / flashlight / retractable stand) |
|  BMP21-MAGNET | Magnet accessory |
|  BMP-SC-1 | Soft case |
|  BMP21-PLUS-HC | Hard case |

* Printer includes: one M21-750-499 label cartridge, quick start guide and 2-year warranty. (batteries not included).


** Printer kit includes: AC adapter / battery charger, hard case, Li-Ion battery, one M21-750-499 label cartridge, quick start guide and 2-year warranty.

US Patent Nos. 8,322,936; 8,846,171.

Printer specifications

| Printer | |
|-----------------------------------|---|
| Printer name | BMP®21-PLUS Label Printer |
| Print resolution | Thermal transfer, 203 dpi |
| Max lines of print | 4 |
| Print speed | 0.4 in / sec (10 mm / sec) |
| Keyboard type | ABC or Cyrillic |
| Dimensions | 9.5 in. x 2.5 in. x 4.5 in. (236.22 x 63.5 x 114.3 mm) |
| Weight | 1.66 lbs (0.75 kg) with AA batteries and media roll |
| Warranty | 2 years |
| Operating temp | 40° to 110° F (4° to 43° C) |
| Humidity | 10% to 90% (non-condensing) |
| Storage temp | 0° to 110° F (-18° to 43° C) |
| Continuous or die-cut labels | Continuous labels only |
| Portability | Yes |
| Features | |
| Memory | 16MB, 10 labels (2MB available for storage) |
| User profiles | No |
| Cutter type | Straight cut, single hand manual actuate |
| Cut options | Cut between labels or at end of print job |
| Label retention after cut | Yes |
| Labels per day (average) | 100 |
| Battery life indicator | Yes |
| Label odometer / supply remaining | No |
| Drop test | Transit drop per MIL-STD-810G 5.16.6 S4.6.5 Drop tested: 6 ft. drop |
| Languages | English, Dutch, German, Italian, French, Spanish Portuguese, Russian (separate keyboard version) |
| Units | Inches or millimeters |
| Power | |
| Power supply | 6 AA batteries, AC adapters: US 110V, UK 240V, Europe 220V, or Li-ION rechargeable battery |
| Battery included | No |
| Battery life | Li-ION battery: output of 2,000 2 in. (50.8 mm) labels 6 AA batteries: output of 1,800 2 in. (50.8 mm) labels |
| Rechargeable battery | Lithium Ion 11.7Wh (DC 7.2V 1620 mAh) |
| Charging options | External via AC |
| Re-charge time (estimated) | 2.5 hours |
| Power source voltage | 110-240 |
| Auto shut off | 10 minutes |
| Print functions | |
| Included modes | Wire / cable wrap, cable flag, terminal block, patch panel, circuit breaker, banner landscape and banner portrait |
| Serialization | Yes |
| Barcoding | 39 and 128 |

| Print functions (continued) | |
|--|--|
| Date / time stamp (real time clock) | Yes |
| Fixed length | Yes |
| Mirror print | No |
| Vertical print | Yes |
| Reverse print | No |
| Rotate print | No |
| Auto format | Yes |
| Text justification | Horizontal and vertical: centered |
| Multi-copy printing | Up to 99 copies |
| Multi-line print | Yes |
| Frame feature | No |
| Save files | Yes |
| Display | |
| LCD type / size | LCD, 2 in. x 1 in. (50.8 mm x 25.4 mm) |
| LCD resolution | 132 x 64 pixels |
| LCD characters | 13 characters x 3 lines |
| LCD backlight | Yes, user adjustable |
| Communication and interface | |
| Connectivity | Not applicable |
| PC connectivity | No |
| Import data | No |
| Import manufacturer templates / graphics | No |
| Software compatibility | Not applicable |
| Media | |
| Type | Cartridge with media and ribbon combined |
| Compatible media | M21-series cartridges |
| Maximum print width | 0.63 in. (16 mm) |
| Maximum print length | 36.0 in. (914.4 mm) |
| Maximum liner width | 0.875 in. (22.2 mm) |
| Media widths | 0.250 in. to 0.75 in. (6.4 to 19.1 mm) |
| Color print capability | Single print color on a label |
| Cartridge detection | Yes, width and setting |
| Custom labels available | No |
| Fonts, graphics, symbols | |
| Text sizes | 6-40 pt with autosizing |
| Text attributes | Regular, bold |
| Number of fonts | (1) Brady standard font |
| Number of symbols | 104 |
| Symbol categories | Arrows, datacomm, electrical, greek, home electrical, international, misc, warning |

†  **WARNING:** Cancer www.P65Warnings.ca.gov

We identify and protect premises, products and people.

For more information or to learn more about our innovative products, visit BradyID.com or call 1-888-272-3946.



Y3830921 MS3830921

USA
Customer Service: 1-888-272-3946
Inside Sales: 1-888-311-0775
BradyID.com

Canada
Customer Service: 1-800-263-6179
BradyCanada.ca

Mexico
Customer Service: 1-800-262-7777
Inside Sales: 1-800-262-7777 ext 177
BradyLatinAmerica.com

