
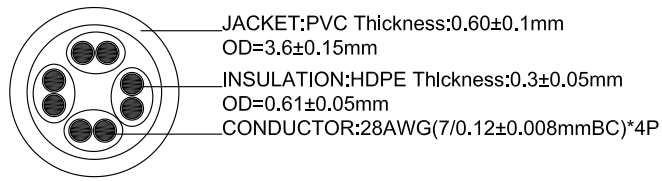


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

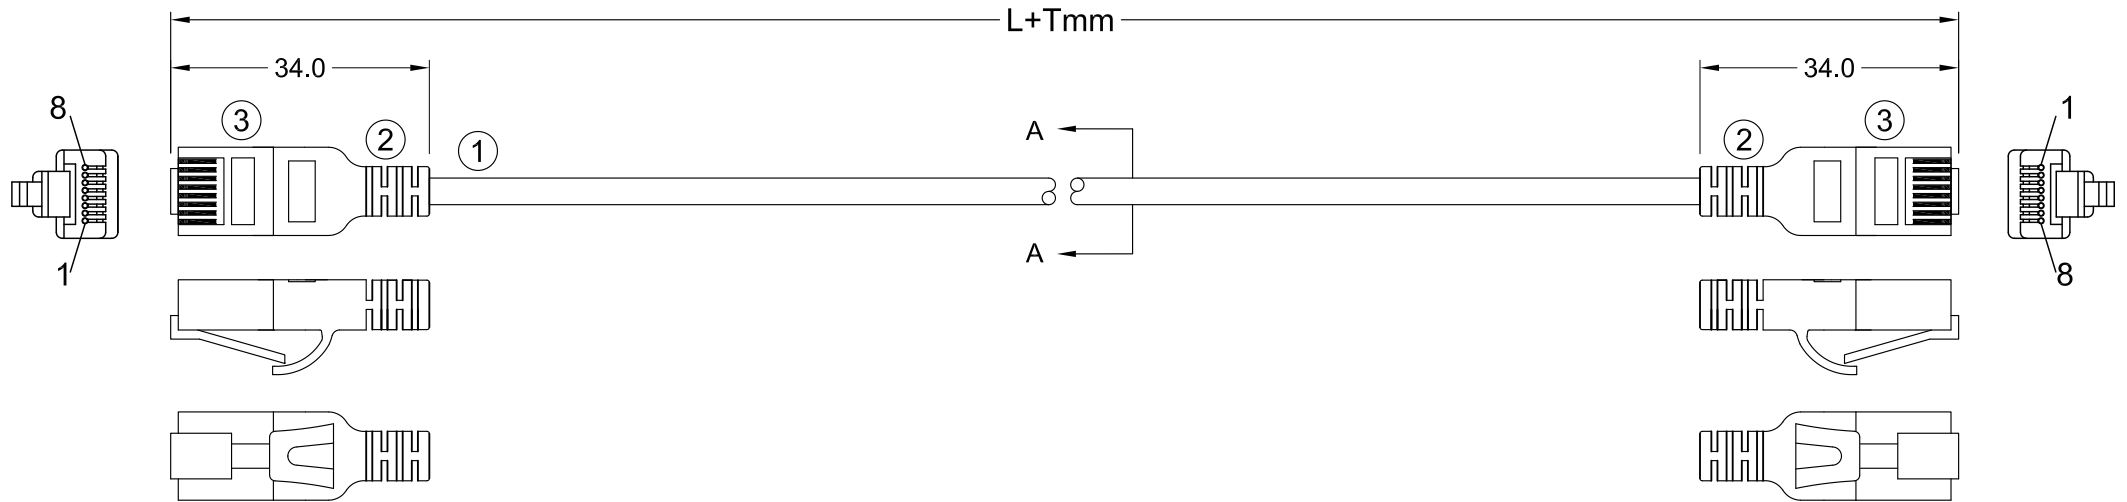

JACKET:PVC Thickness:0.60±0.1mm
 OD=3.6±0.15mm
 INSULATION:HDPE Thickness:0.3±0.05mm
 OD=0.61±0.05mm
 CONDUCTOR:28AWG(7/0.12±0.008mmBC)*4P

SEC:A-A

Standards:

- TIA/EIA * T-568b Standard wiring UL
- RoHS compliant

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8

LENGTH (FT)	TOLERANCE
0.5	± 15mm
1	± 15mm
1.5	± 15mm
2	± 15mm
3	± 15mm
5	± 20mm
7	± 30mm
10	± 30mm
15	± 30mm
20	± 60mm
30	± 60mm
50	+ 80mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	RJ45 PLUG	8P8C 50μ" GOLD PLATED TWO-PIECE PLUG.		
②	MOLDED	PVC SHORT MOLDED BOOT		
①	CABLE	CAT6A UTP 4P/28AWG(7/0.12±0.008MM BC) OD=3.6±0.15mm		