


Pin Assignment

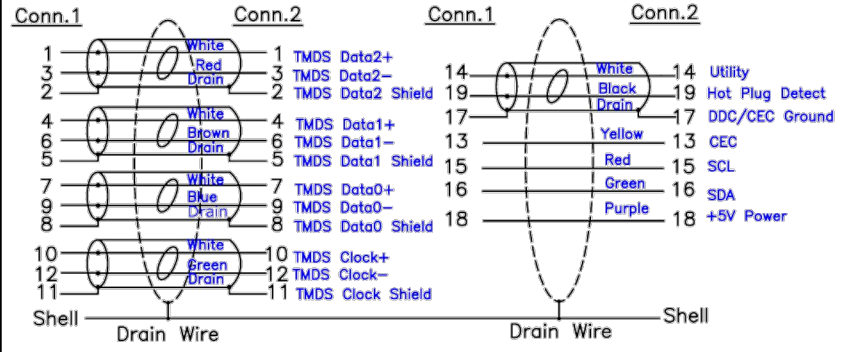

Electrical Test:

- 100%Test(Open, short, miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 10M ohm min.
- Hi-pot:100V DC/10ms

ITEM #	DESCRIPTION	QTY.	UNIT
⑤	COPPER FOIL	0.11	M
④	Outside Molding: 45P PVC, Black	20	g
③	Inside Molding: PE	3	g
②	HDMI 19P Male, Pin Gold Plated, Shell Gold Flash, Insulation: Black	2	pcs
①	High Speed HDMI Cable with Ethernet Cable: UL20276 [28AWG(7/0.127TC)*1PR+DW(1/0.32CCS)+AL/Mylar]*5P+(1/0.32CCS)*3C+28AWG(7/0.127TC)*1C+Filler+AL/MY+DW(7/0127TC)+Braid(16/5/0.12Al/mg)+Jacket OD:7.30±0.2mm Color: Black, Cable Printing: HIGH SPEED HDMI® CABLE WITH ETHERNET E342987 AWM STYLE 20276 80°C 30V VW-1---c AWM I II A/B 80°C 30V FT1	L	M

PART DIMENSIONAL TOLERANCES ALL DIMENSIONS ARE INCHES [mm] .XX = ±0.015 [0.4mm] .XXX = ±0.005 [0.1mm] ANGULAR = ±1/2°		5 SKYLINE DRIVE, HAWTHORNE NY. 10532 (914) 592-1800 WWW.BTX.COM	
DO NOT SCALE FROM DRAWING		High Speed HDMI Cable with Ethernet, 28AWG, Gold Flash, 3ft	
DRAWN: R.R.	DATE: 2/22/16	RoHS COMPLIANT? YES	REVISION N/A
APRVD: --	DATE: -/-	SIZE A	DWG # BTX-HDMM03
FIRST PRODUCT: ---		DRAWING SCALE N / A	FILENAME: btx-hdmm03.dwg
DRAWING SCALE N / A		SHEET #1 OF 1	DATE 02/22/2016