



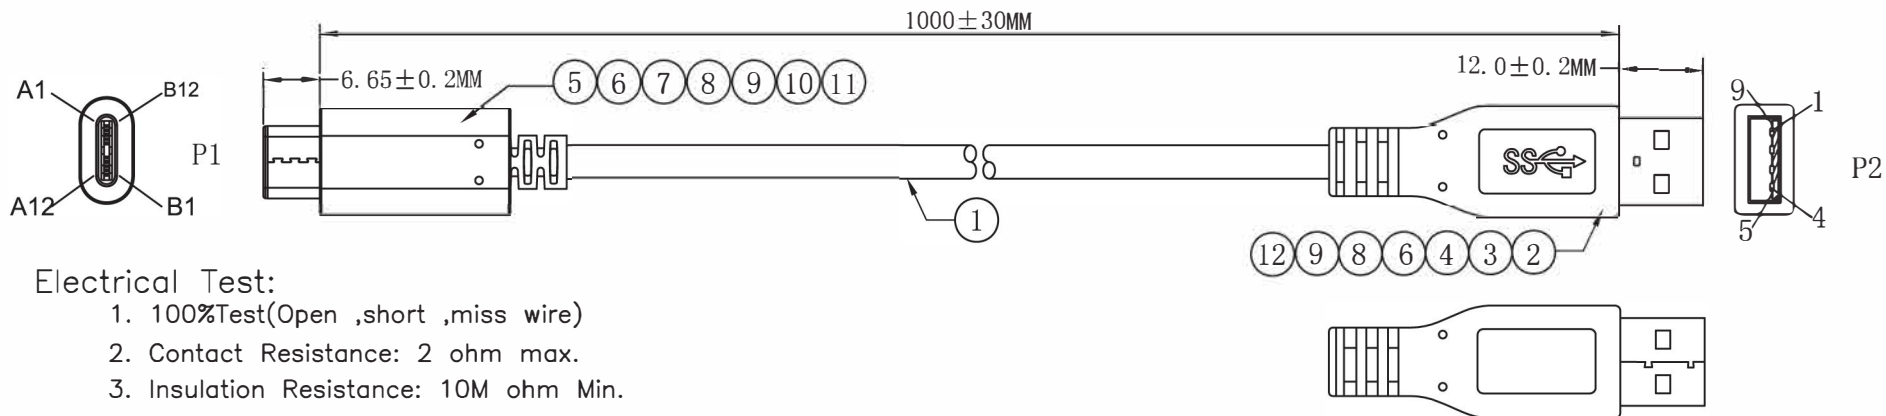


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm Min.
4. Hi-Pot: 300VDC/10ms.

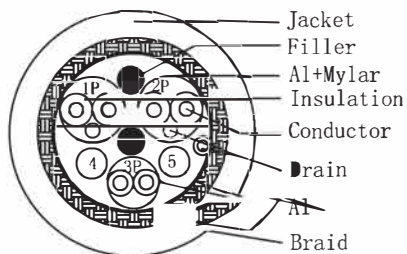

Pin Assignment

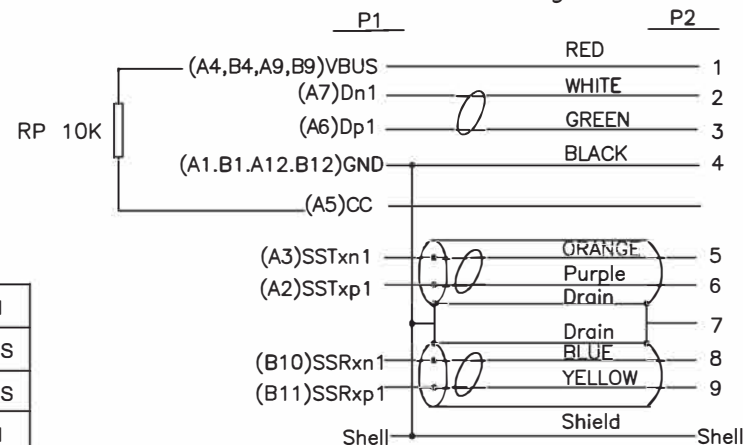

12	W=5MM 25u copper foil	0.016	M
11	USB TYPE C~On the tinplate plating nickel	1	PCS
10	USB TYPE C~Under the tinplate plating nickel	1	PCS
9	H.S TUBE ϕ 1.0 Color:Black	0.02	M
8	H.S TUBE ϕ 2.5 Color:Black	0.028	M
7	Transparent PE	4	G
6	45P PVC Color:Black	16	G
5	USB C TYPE Connector With PCBA(Resistance10K Ω)	1	PCS
4	USB3.0 AM Back Shell Nickel Plated Shell	1	PCS
3	USB3.0 AM Front Shell Nickel Plated Shell	1	PCS
2	USB3.0 AM Solder Blue Insulation	1	PCS
1	USB3.1~[30AWG (7/0.1TC)+EAM]*2P+[30AWG (7/0.1TC)*1P+A]+24AWG (7/0.2TC)*2C+AEB (16/7/0.12TC 85%TC)OD:4.5MM~Color:Black NO Marking	1	M
NO	DESCRIPTION	Q'TY	UNIT

REV.	DESCRIPTION		DATE
	TOLERANCE		
	INCHES	M/M	
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
DRAWN BY	CUSTOMER :		
CHECK BY	CUSTOMER P/N:		
APPD BY	SCALE	NONE	REV
	UNIT	MM	A01
	DATE	2015.07.06	1/1



BTX Technologies, Inc. | www.btx.com

TITLE: USB3.1 Gen 2 USB 3.0 Type AM to Type CM cable,10G 3A,L=1M, without EMARK IC,Black