



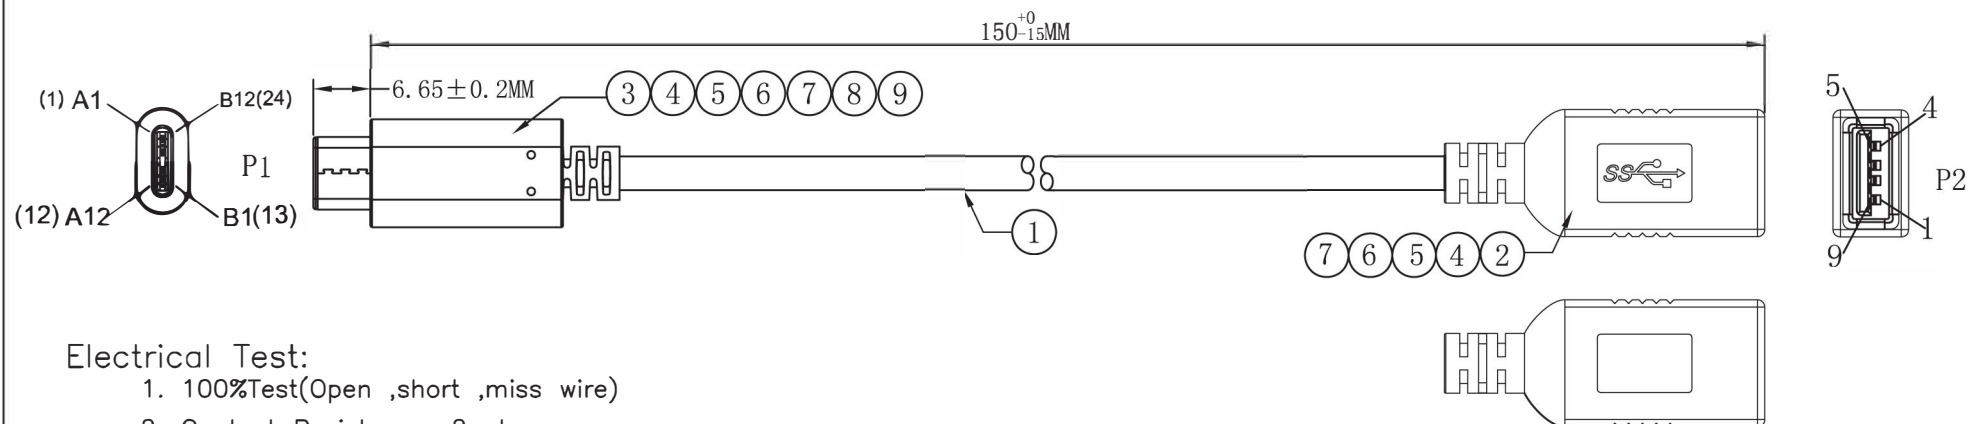


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm Min.
4. Hi-Pot: 300VDC/10ms.

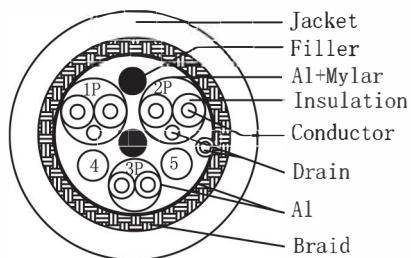

Pin Assignment

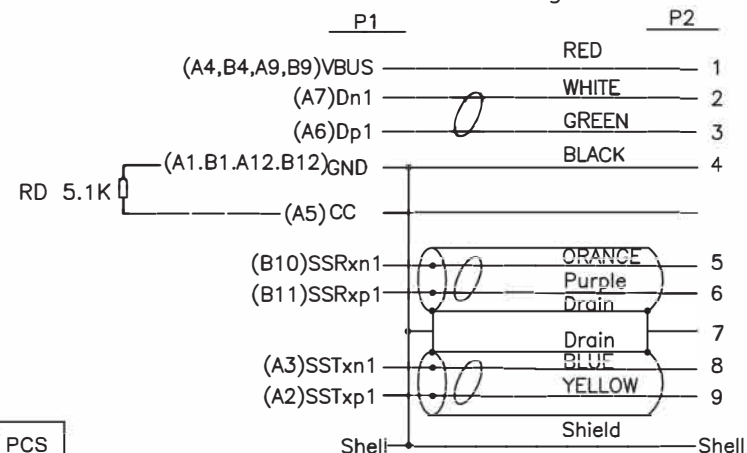

9	USB TYPE C~On the tinplate plating nickel	1	PCS
8	USB TYPE C~Under the tinplate plating nickel	1	PCS
7	H.S TUBE φ 1.0 Color:Black	0.02	M
6	H.S TUBE φ 2.5 Color:Black	0.028	M
5	Transparent PE	8	G
4	45P PVC Color:Black	16	G
3	USB C TYPE Connector With PCBA(Resistance5.1KΩ)	1	PCS
2	USB3.0 (A)F Blue Insulation Solder	1	PCS
1	USB3.1~[30AWG(7/0.1TC)+EAM]*2P+[30AWG(7/0.1TC)*1P+A]+24AWG(7/0.2TC)*2C+AEB(16/7/0.12TC 85%TC)OD:4.5MM~Color:Black NO Marking	0.13	M
NO	DESCRIPTION	Q'TY	UNIT

REV.	TOLERANCE		DESCRIPTION		DATE
	INCHES	M/M			
.X	.015	.30	BTX BTX Technologies, Inc. www.btx.com TITLE: USB 3.1 Gen 1 Type CM to USB 3.0 Type AFAAdapter, 5G 3A, L=0.15M,without EMARK IC, Black Color		
.XX	.010	.10			
.XXX	.005	.05			
DRAWN BY			CUSTOMER :		
CHECK BY			CUSTOMER P/N:		
APPD BY			SCALE	NONE	DRAWING NO:
			UNIT	MM	
			DATE	2015.07.06	REV A01
			1/1		