



Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm Min.
4. Hi-Pot: 300VDC/10ms.

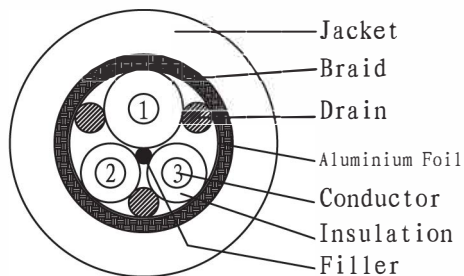

Pin Assignment

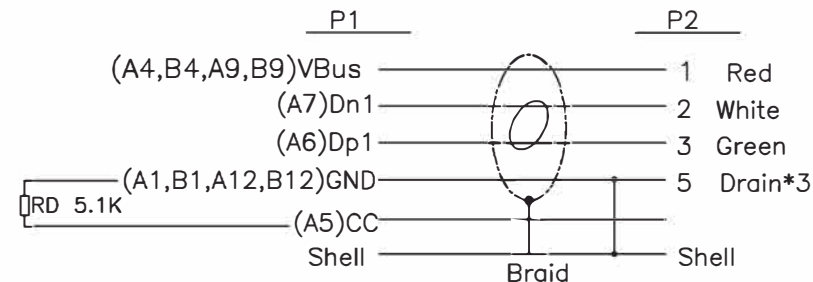

8	USB TYPE C~On the tinplate plating nickel	1	pcs
7	USB TYPE C~Under the tinplate plating nickel	1	pcs
6	H.S TUBE ϕ 1.0 Color:Black	0.016	M
5	45P PVC Color:Black	16	g
4	Transparent PE	8	g
3	Micro USB(B)M Solder Black Insulation Nickel Plated Shell	1	pcs
2	USB C TYPE Connector With PCBA(Resistance5.1K Ω)	1	pcs
1	NO~UL 30AWG (19/0.06TC)*2C+24AWG (26/0.1TC+250Dnylon)*1C+3E (19/0.05TC+250Dnylon)+AB(16/9/0.06TC 95%TC) OD:3.0MM Color:Black NO Marking	1	M
NO	DESCRIPTION	Q'TY	

REV.	DESCRIPTION	DATE
1	TOLERANCE INCHES M/M	
.X	.015 .30	
.XX	.010 .10	
.XXX	.005 .05	

BTX		BTX Technologies, Inc. www.btx.com	
TITLE: USB 2.0 Type CM to Micro BM Cable, 480M 3A, L=1M,without EMARK IC, Black Color			
DRAWN BY		CUSTOMER :	
CHECK BY		CUSTOMER NO.:	
APPD BY		SCALE NONE	
		UNIT MM	
		DATE 2015.07.06	
		DRAWING NO.:	
		REV A01	
		1/1	