



Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm Min.
4. Hi-Pot: 300VDC/10ms.

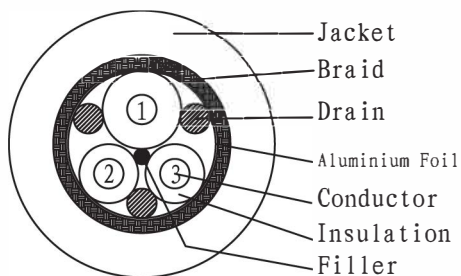

Pin Assignment

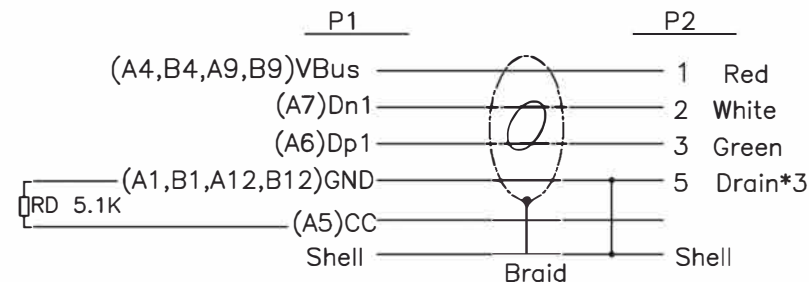

8	USB TYPE C~On the tinplate plating nickel	1	pcs	REV.  TOLERANCE INCHES M/M .X .XX .XXX .015 .010 .005 .30 .10 .05 DESCRIPTION TITLE: USB 2.0 Type CMto Micro BM Cable, 480M 3A, L=2M,without EMARK IC, Black Color DATE CUSTOMER : CUSTOMER NO.: DRAWING NO.: REV A01 1/1
7	USB TYPE C~Under the tinplate plating nickel	1	pcs	
6	H.S TUBE ϕ 1.0 Color:Black	0.016	M	
5	45P PVC Color:Black	16	g	
4	Transparent PE	8	g	
3	Micro USB(B)M Solder Black Insulation Nickel Plated Shell	1	pcs	
2	USB C TYPE Connector With PCBA(Resistance5.1K Ω)	1	pcs	
1	NO~UL~30AWG (19/0. 06TC)*2C+22AWG (41/0. 10TC+250D)*1C+E (19/0. 05TC+250D)*3+AB (16/9/0. 06TC)95%TC~OD:3. 2MM~Color:Black NO Marking	2	M	
NO	DESCRIPTION	Q'TY		