
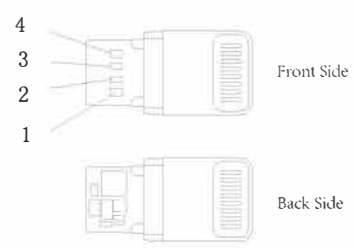



Change Code	Edition	Change Content	Editor	DATE
REV.	A01	The Firs		2015.04.17

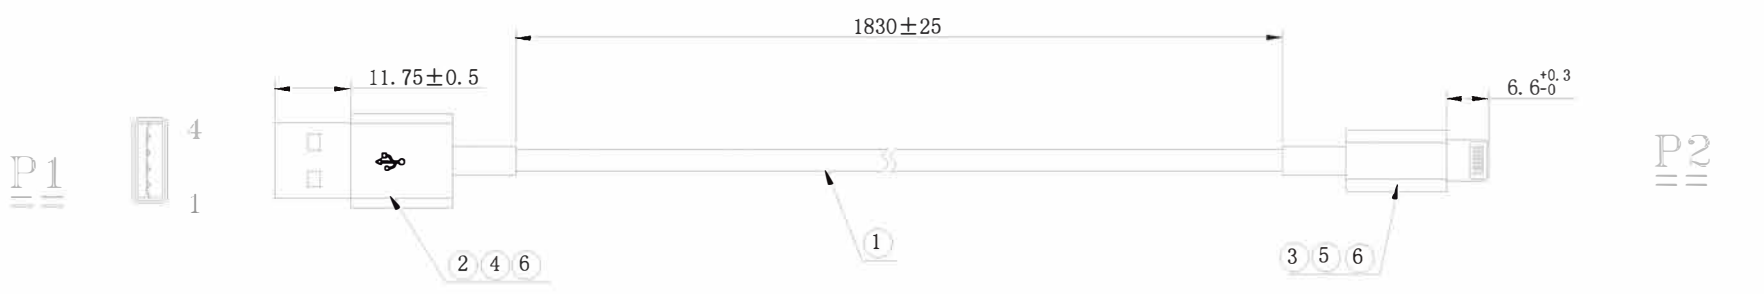

Wire List

P1	Color	P2
1	Red	1
2	White	3
3	Green	2
4	Ground Wire	4
Metal Shell	Weave	Metal Shell

Notice

1. Electrical test 100% OK
2. Test conditions
- 01 On resistance: 5ohm
- 02 Insulation resistance: 1Mohm MIN DC 100v
3. Conform to RoHS stand

6				PCS	2	
5	Internal Mode	8P, Lighting Round Internal Mode With SR TPE, OD3.5		SET	1	
4	Internal Mode	USB AM Internal Mode With SR TPE, OD3.5		SET	1	
3	Plug	1. 8 pin lightning connector 2.lightning metal shell OD 3.5 3. 8 pin lightning round ABS shell. silk-screen customer logo		SET	1	
2	Plug	1. USB AM, nickel-plated steel casing, gold-plated terminal, white plastic insulator 2. USB flat shell, unopore OD4.4		PCS	1	
1	Wire	51/0. 1TC*1C+7/0. 127TC*2C+D51/0. 10*1C+AL+B64/0. 10TC PVC OD3.5		PCS	1	cut wire:1910MM
	Model NO.	Name	Description	Unit	Dosage	Remark

GENERAL TOLERANCES		BTX Technologies, Inc.   www.btx.com					
.X: ± .XX: ± .XXX: ± ANGULAR: ±	View			Product: USB AM TO 8P MFI (6FT)		Customer Code:	page: 1 of 1
	APPROVED BY:			Item#: 10LT-06-WH & 10LT-06-BK		Customer Name:	
CHECKED BY:		Unit: mm	Scale: none	Customer Edition:			
DRAWN BY	DATE: 2015.04.17	Size: A4	Edition: A01	Customer Approval:			
		Customer:					