

Overview:

The AV over IP 4K/60 Uncompressed Extender, Fiber allows HDMI and DisplayPort source equipment supporting up to 4K @ 60Hz resolution to be connected and extended to create a 4K/60 HDMI based Video Wall, Virtual Matrix Switch, and Virtual Splitter arrangements of user configurable size (X by Y) supporting 100's of screens, depending on network bandwidth, utilizing one Receiver for each display in the array. Each Transmitter (500761-TX) and Receiver (500761-RX) can be connected via OM3 multimode fiber cable with dual LC connectors up to 985ft (300m) from a 10Gig Ethernet Switch.

The Transmitter supports 2CH audio insertion and the Receiver supports 2CH audio extraction. The Transmitter and Receiver, each come with a power supply, an IR Emitter and IR Sensor for IR based remote control applications, a wall mount bracket kit for securing the unit to a wall and a 4-pin terminal block connector for RS232 connectivity.

The MuxLab Pro Digital Network Controller (500811) is available to simplify centralized configuration and control, software updates, and allows for management from the MuxLab Control smartphone and tablet App, and third party control Apps.




Key Features:

- Supports HDMI up to 4K/60 on Transmitter and Receiver
- Supports DisplayPort 1.2a up to 4K/60 on Transmitter
- Uncompressed up to 4K/60 (4:2:0) (zero latency), and light compression visually lossless at (4:4:4) (<1 frame latency)
- Supports Video Wall, Virtual Switch & Splitter configurations
- Supports point-to-point, point-to-multipoint and multipoint-to-multipoint applications
- Transmission up to 985ft (300m) over OM3 multimode fiber
- Supports audio insert (TX) & audio extract (RX)
- 1G Ethernet Switch port to connect network devices
- Supports RS232 and IR transmission for remote control
- Managed via Pro Digital Network Controller (500811), MuxLab Control App via smartphones and tablets, and 3rd Party control Apps

Specifications									
Environment	HDMI 2.0 and HDCP 2.2								
Devices	Blu-Ray, projectors, monitors, TV, PC, laptops, and media servers supporting HDMI.								
Bandwidth	594MHz								
Signals	HDMI 2.0 and DisplayPort 1.2a protocol								
Connectors	Connectors per TX and RX: One (1) HDMI receptacle. One (1) DisplayPort connector (TX only). One (1) dual LC multimode fiber connector (for 10GbE port). One (1) RJ45S for Cat 5e/6 unshielded or shielded twisted pair (1GbE port). Two (2) 3.5mm jacks for IR emitter and IR sensor. One (1) 3.5mm jacks for audio insertion/extraction (insert on TX, and extract on RX). One (1) 4-pin terminal block connector for RS232. One (1) 2.1mm power jack (for DC power).								
<i>Note: Cables not included.</i>									
Maximum Distance	OM3 Multimode Fiber: 985ft (300m) up to 4K @ 60Hz								
<i>Based on a maximum length of 6.6ft (2m) of HDMI cable per end.</i>									
Latency	No Compression (Zero Latency) up to 4K/60 (4:2:0), and less than one Frame (16ms) @ 4K/60 (4:4:4)								
Compression	Uncompressed up to 4K/60 (4:2:0), and light compression for 4K/60 (4:4:4) only								
Network Bandwidth	< 10Gbps								
Network Requirement	10Gig Network XFI, IEEE 802.3								
IR Frequency	38 to 56KHz								
Fiber Cable	One (1) dual LC multimode fiber cable, OM3 or better is required								
RJ45 Pin Configuration	<p>RJ45 Link</p> <table border="0"> <tr> <td>Pin 1 (R)</td> <td>Pin 2 (T)</td> </tr> <tr> <td>Pin 3 (R)</td> <td>Pin 6 (T)</td> </tr> <tr> <td>Pin 4 (R)</td> <td>Pin 5 (T)</td> </tr> <tr> <td>Pin 7 (R)</td> <td>Pin 8 (T)</td> </tr> </table> <p><i>Reverse Polarity Sensitive. Use EIA/TIA 568A or 586B straight-through wiring.</i></p>	Pin 1 (R)	Pin 2 (T)	Pin 3 (R)	Pin 6 (T)	Pin 4 (R)	Pin 5 (T)	Pin 7 (R)	Pin 8 (T)
Pin 1 (R)	Pin 2 (T)								
Pin 3 (R)	Pin 6 (T)								
Pin 4 (R)	Pin 5 (T)								
Pin 7 (R)	Pin 8 (T)								
Power Source	Input: 100-240V/1.5A (max) @ 50-60Hz Output: 12DC @ 3A Includes appropriate power cord for region (US, UK or Euro)								
Power Consumption	Transmitter: 13.32Watt Receiver: 15.96Watt								
Temperature	Operating: 0° to 40°C Storage: -20° to 85°C Humidity: Up to 95% non-condensing								
Dimensions	8.25" x 16.14" x 1.37" (21cm x 14cm x 3.5cm)								
Weight	4.06lbs (1.85kg)								
Compliance	Regulatory: FCC, CE, RoHS Flammability: 94V0								
Warranty	3 years								
Order Information	500761-TX-US AV over IP 4K/60 Uncompressed Transmitter, Fiber, US (UPC: 627699907610) 500761-RX-US AV over IP 4K/60 Uncompressed Receiver, Fiber, US (UPC: 627699807613) 500761-TX-UK AV over IP 4K/60 Uncompressed Transmitter, Fiber, UK (UPC: 627699917619) 500761-RX-UK AV over IP 4K/60 Uncompressed Receiver, Fiber, UK (UPC: 627699817612) 500761-TX-EU AV over IP 4K/60 Uncompressed Transmitter, Fiber, EU (UPC: 627699927618) 500761-RX-EU AV over IP 4K/60 Uncompressed Receiver, Fiber, EU (UPC: 627699827611)								

Typical Application

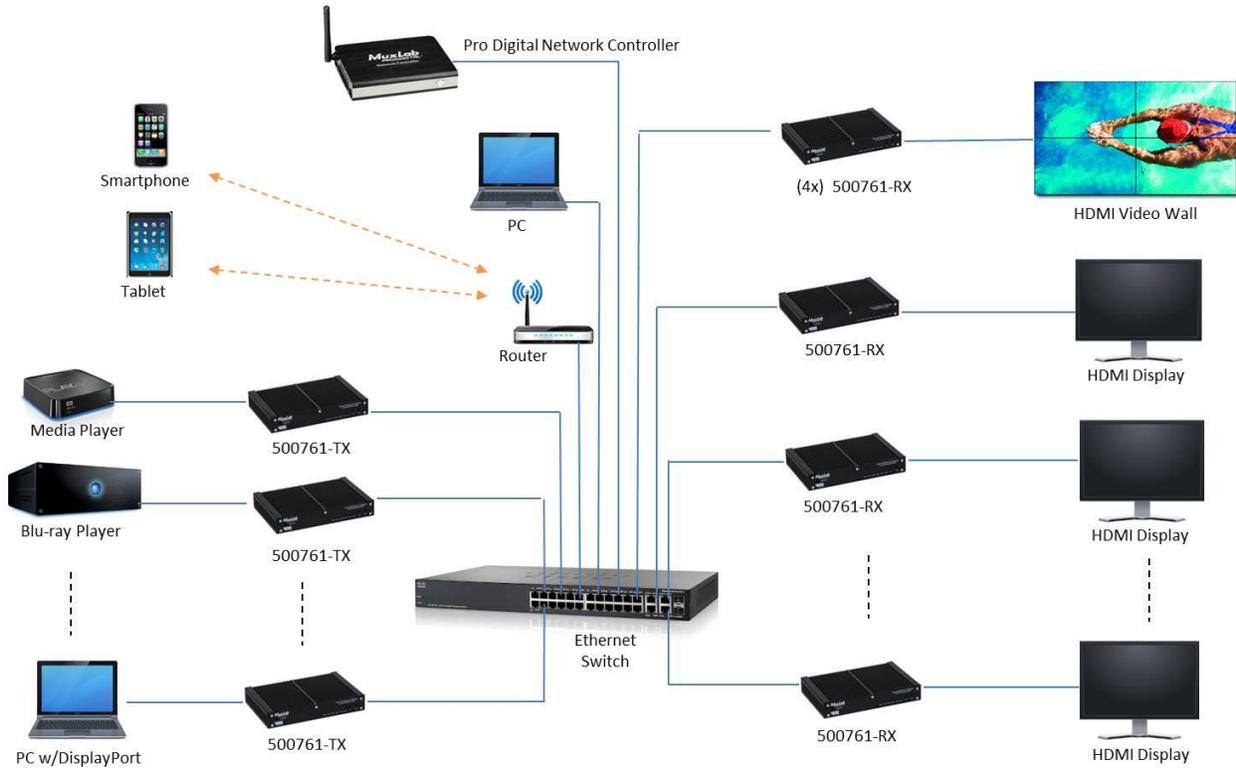

MuxLab Inc.

8495 Dalton Road, Mount Royal, Quebec, Canada, H4T 1V5
 Tel: (514) 905 0588 Fax: (514) 905 0589
 Toll Free: 1 877 689-5228
 E-mail: videoease@muxlab.com
www.muxlab.com