

Do You Hear What I Hear?

The Just Add Power 2GΩ/3G ST1 Sound Transceiver is an audio-only device in the 3G HD over IP system.

Use the ST1 Sound Transceiver to add a stereo audio source to a Just Add Power system, or to extract stereo audio from an existing Transmitter at a speaker location.

Set the Mode when installing the unit to make it either:
Audio Input – Transmitter Mode
Audio Output – Receiver Mode


Build a future-proof infrastructure. The ST1 Sound Transceiver integrates seamlessly with all other products in the 3G system, and is also backwards-compatible with 2G systems!



TX/RX JUMPER

Features	
Stereo audio with variable audio	
Transmitter or Receiver	
Set by a jumper on the bottom	
Control endpoints with RS232 & IR	
Input stereo audio to play on any other Receiver	
Output stereo audio from any other Transmitter	

Compliance	RoHS/FCC/CE
Supported Audio	2-channel audio 192kHz/24-bit
Encryption	Hardware-Based AES 256-bit Encryption of Network Video Signal
Ports	Gigabit Ethernet Stereo In/Out 3.5mm RS232 w/ null modem
Dimensions & Weight	121x30x125mm/5.0x1.2x4.9 inch 0.27 kg / 0.6 lb
Operating Temp	0-60 °C / 32-140 °F
Bandwidth	180-500 Mbps
Power Supply (not included)	~4.7 – 23V 5.5mm/2.1mm, Positive tip
PoE	10 watts maximum

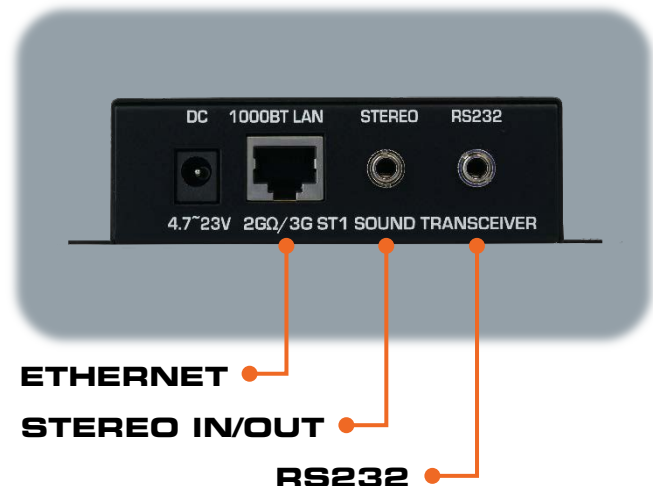

ETHERNET
STEREO IN/OUT
RS232