

## Cuboid 15

Two-way, full range, passive, 15" loudspeaker







#### **FEATURES**

- Portrait or landscape mounting options
- Rotatable high-frequency horn
- 58Hz 18kHz frequency response ±3dB
- Maximum SPL 126dB (continuous), 132dB (peak)
- 80° horizontal x 50° vertical coverage

Cuboid 15 is a full range, two-way, passive, 15" loudspeaker designed to perform. For any applications requiring big output, it effortlessly delivers rich and detailed sound with extra punch and precision.

With its steel grille and optional mounting hardware the professionally presented Cuboid 15 can be fixed in either portrait or landscape mode for a flexible, simple installation.

Cuboid 15 features a 15" (380mm) low frequency (LF) driver for extra

bass and midband with a 1" (25mm) exit high frequency (HF) compression driver for clarity of vocal and high frequency projection. The HF section delivers consistent coverage in either plane from a user-rotatable horn.

When coupled with the Zone series, a ZonePad and the WebApp makes setting up a system and end user control simple and intuitive.

### **APPLICATIONS**



Bars/ Restaurants Venues



Hotels



Education

**Facilities** 



Worship






Fitness Studios




# **Cuboid 15**

Two-way, full range, passive, 15" loudspeaker



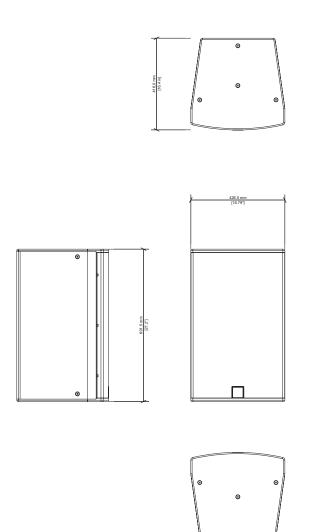





### **SPECIFICATIONS**

TYPE	: Two-way, full range, passive loudspeaker
FREQUENCY RESPONSE (with preset)	: 58Hz - 18kHz ± 3dB
	-10dB @ 40Hz
DRIVERS	: LF: 15" (380mm), ferrite motor system
	: HF: 1" (25mm) exit/1.7" (44mm) voice coil,
	polyimide dome compression driver
RATED POWER	: 500W (AES) 2000W (peak)
NOMINAL IMPEDANCE	: 8Ω
SENSITIVITY (1W/1m)	99dB
MAXIMUM SPL	126dB (cont), 132dB (peak)
CROSSOVER	: 2.3kHz passive
DISPERSION (-6dB)	: 80° H x 50° V (user-rotatable)
ENCLOSURE	: Trapezoid wooden cabinet
FINISH	: Black textured paint
PROTECTIVE GRILLE	Black perforated steel with scrim cloth backing
CONNECTORS	2x NL4 type
PIN CONNECTIONS (INPUT)	: 1+/1-
FITTINGS	: 19 x M8, inset bolts
DIMENSIONS	: (W) 426.5mm x (H) 691.5mm x (D) 416mm
	: (W) 16.79" x (H) 27.22" x (D) 16.38"
WEIGHT	28kg (61.73lbs)
ACCESSORIES (available separately)	: Wall Bracket C, U Bracket D, M8 Eye Bolt
RECOMMENDED SUB	: Sub 15





Paint Finish

### optimal-audio.co.uk

© 2021. Optimal Audio Group Ltd.